




SGARIA.

Trustable for life



Chains & Sprockets

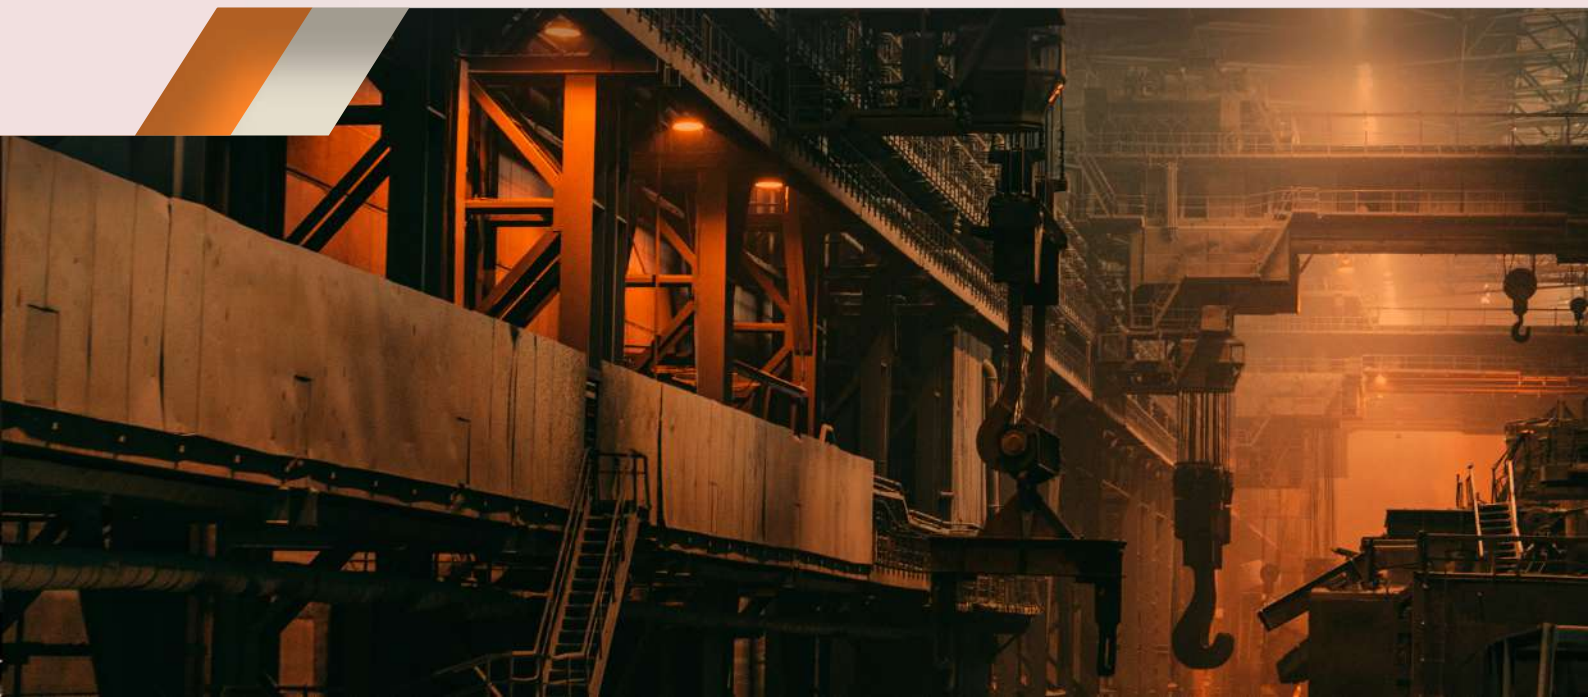

COMPANY PROFILE



The Sgaria

In addition to the best products, we work objectively and efficiently, with integrity and a sense of urgency to generate the best services.

Check out some of the pillars of our company:

Customer Focus: Our customers are the reason for our existence. We are committed to meeting your demands on site and time required;

Safety: We are strict in meeting our standards, valuing the safety of our customers and contributors;

Quality Results: We seek to maximize results by valuing quality in every detail of our operation;

Teamwork: Together we achieve our goals, acting in a shared way will more easily achieve achievements and good results, sharing achievements and results.

Certificates

By bringing together technical force with design and experience, Sgaria has all the documentation necessary to deliver a certified quality product.






Sgaria Hong Kong

Address:

10 / F, Pilkem Commercial Center, 8
Pilkem Street, Jordan, Kowloon, Hong Kong
VAT CODE: 2288999



Sgaria EUA

Address:

175 SW 7th Street – Unit#1515
Miami – FL 33130
Phone: +1 786 773 4767
VAT CODE: 83-1661307



Sgaria China

Address:

Business Center in Mirae Asset Tower, 166
Lujiazui Ring Road 20Floor
Phone: +852 (3) 6789958
VAT CODE: 91310115MA1K4CN75C



Sgaria Brasil


Address:

VITÓRIA-ES
e-mail: comercial.ind@sgaria.com
Telephone: +55 27 2142-5884
CNPJ: 28.446.398/0001-03



A SERIES SHORT PITCH PRECISION ROLLER CHAINS


Simplex roller chains & bush chains

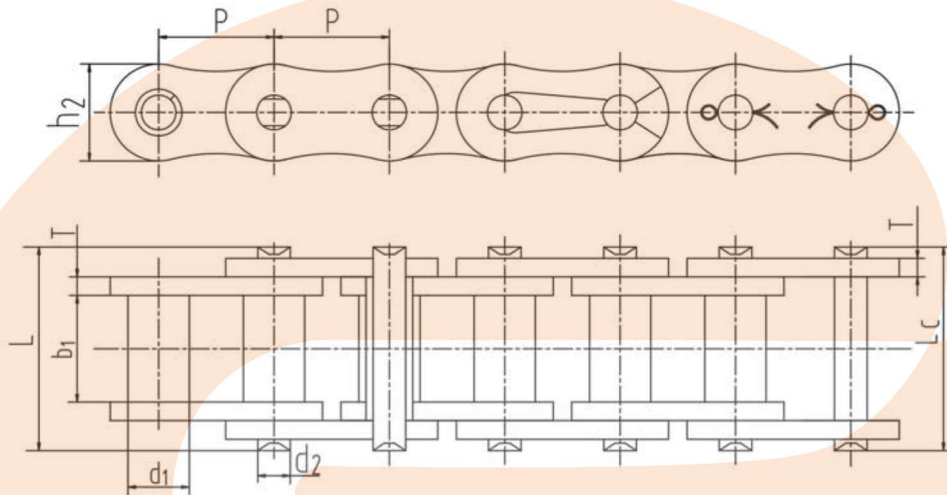

DIN/ISO	ANSI	Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Pin Length		Inner Plate Depth	Plate Thickness	Ultimate Tensile Strength	Average Tensile Strength	Weight Per Meter
DIN/ISO Chain No.	ANSI Chain No.	P	d ₁ (max)	b ₁ (min)	d ₂ (max)	L(max)	L _c (max)	h ₂ (max)	T(max)	Q(min)	Q _o	q
		mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
*03C	*15	4.7625	2.48	2.38	1.62	6.10	6.90	4.30	0.60	1.80/409	2.0	0.08
*04C-1	*25	6.3500	3.30	3.18	2.31	7.90	8.40	6.00	0.80	3.50/795	4.6	0.15
*06C-1	*35	9.5250	5.08	4.77	3.58	12.40	13.17	9.00	1.30	7.90/1795	10.8	0.33
085-1	41	12.7000	7.77	6.25	3.58	13.75	15.00	9.91	1.30	6.67/1516	12.6	0.41
08A-1	40	12.7000	7.95	7.85	3.96	16.60	17.80	12.00	1.50	14.10/3205	17.5	0.62
10A-1	50	15.8750	10.16	9.40	5.08	20.70	22.20	15.09	2.03	22.20/5045	29.4	1.02
12A-1	60	19.0500	11.91	12.57	5.94	25.90	27.70	18.00	2.42	31.80/7227	41.5	1.50
16A-1	80	25.4000	15.88	15.75	7.92	32.70	35.00	24.00	3.25	56.70/12886	69.4	2.60
20A-1	100	31.7500	19.05	18.90	9.53	40.40	44.70	30.00	4.00	88.50/20114	109.2	3.91
24A-1	120	38.1000	22.23	25.22	11.10	50.30	54.30	35.70	4.80	127.00/28864	156.3	5.62
28A-1	140	44.4500	25.40	25.22	12.70	54.40	59.00	41.00	5.60	172.40/39182	212.0	7.50
32A-1	160	50.8000	28.58	31.55	14.27	64.80	69.60	47.80	6.40	226.80/51545	278.9	10.10
36A-1	180	57.1500	35.71	35.48	17.46	72.80	78.60	53.60	7.20	280.20/63682	341.8	13.45
40A-1	200	63.5000	39.68	37.85	19.85	80.30	87.20	60.00	8.00	353.80/80409	431.6	16.15
48A-1	240	76.2000	47.63	47.35	23.81	95.50	103.00	72.39	9.50	510.30/115977	622.5	23.20

B SERIES SHORT PITCH PRECISION ROLLER CHAINS


Simplex roller chains

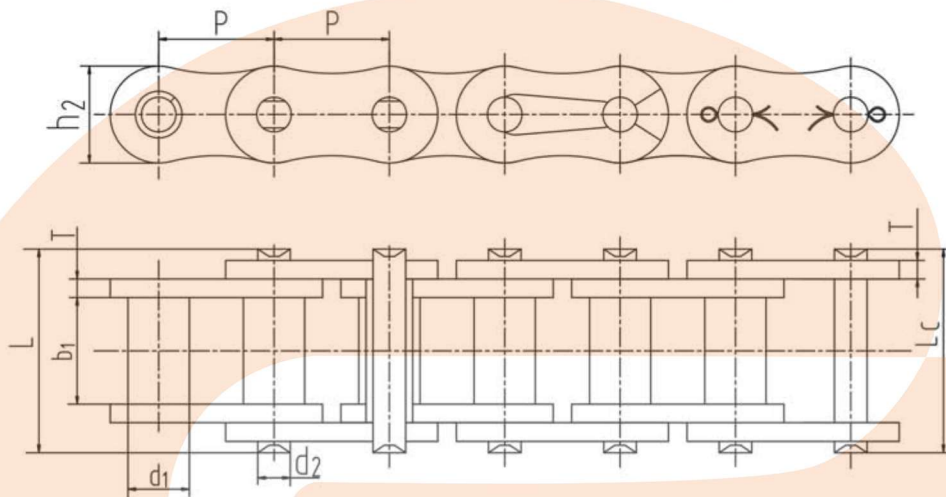


DIN/ISO	Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Pin Length		Inner Plate Depth	Plate Thickness	Ultimate Tensile Strength	Average Tensile Strength	Weight Per Meter
DIN/ISO Chain No.	P	d ₁ (max)	b ₁ (min)	d ₂ (max)	L(max)	L _c (max)	h ₂ (max)	T(max)	Q(min)	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
04B-1	6.000	4.00	2.80	1.85	6.80	7.8	5.00	0.60	3.0/682	3.2	0.11
05B-1	8.000	5.00	3.00	2.31	8.20	8.9	7.10	0.80	5.0/1136	5.9	0.20
*06B-1	9.525	6.35	5.72	3.28	13.15	14.1	8.20	1.30	9.0/2045	10.4	0.41
08B-1	12.700	8.51	7.75	4.45	16.70	18.2	11.80	1.60	18.0/4091	19.4	0.69
10B-1	15.875	10.16	9.65	5.08	19.50	20.9	14.70	1.70	22.4/5091	27.5	0.93
12B-1	19.050	12.07	11.68	5.72	22.50	24.2	16.00	1.85	29.0/6591	32.2	1.15
16B-1	25.400	15.88	17.02	8.28	36.10	37.4	21.00	4.15/3.1	60.0/13636	72.8	2.71
20B-1	31.750	19.05	19.56	10.19	41.30	45.0	26.40	4.50/3.5	95.0/21591	106.7	3.70
24B-1	38.100	25.40	25.40	14.63	53.40	57.8	33.20	6.00/4.8	160.0/36364	178.0	7.10
28B-1	44.450	27.94	30.99	15.90	65.10	69.5	36.70	7.50/6.0	200.0/45455	222.0	8.50
32B-1	50.800	29.21	30.99	17.81	66.00	71.0	42.00	7.00/6.0	250.0/56818	277.5	10.25
40B-1	63.500	39.37	38.10	22.89	82.20	89.2	52.96	8.50/8.0	355.0/80682	394.0	16.35
48B-1	76.200	48.26	45.72	29.24	99.10	107.0	63.80	12.00/10.0	560.0/127272	621.6	25.00
56B-1	88.900	53.98	53.34	34.32	114.6	123.0	77.80	13.50/12.0	850.0/193180	940.0	35.78
64B-1	101.600	63.50	60.96	39.40	130.0	138.5	90.17	15.00/13.0	112.0/254544	1240.0	46.00
72B-1	114.300	72.39	68.58	44.48	147.4	156.4	103.60	17.00/15.0	1400.0/318180	1550.0	60.80

DOUBLE PITCH CONVEY CHAIN

Small Roller Type

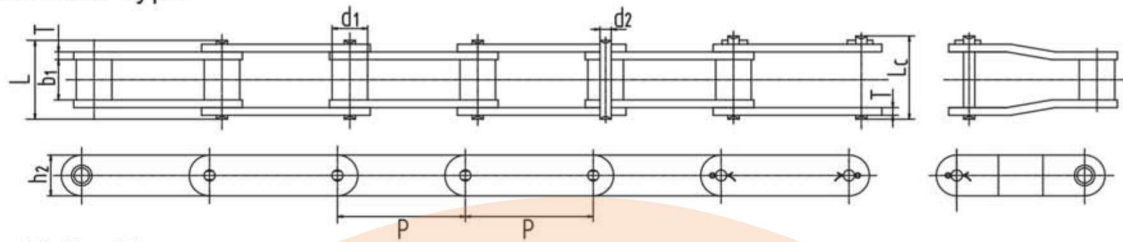

Large Roller Type

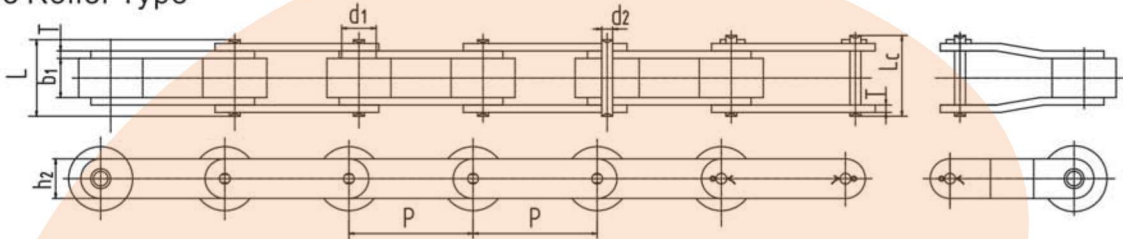

ISO	ANSI	Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Pin Length		Inner Plate Depth	Plate Thickness	Ultimate Tensile Strength	Average Tensile Strength	Weight Per Meter
ISO Chain No.	ANSI Chain No.	P	d1(max)	b1(min)	d2(max)	L(max)	Lc(max)	h2(max)	T(max)	Q(min)	Qo	q
		mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
C208A	C2040	25.40	7.95	7.85	3.96	16.6	17.8	12.0	1.50	14.1/3205	16.7	0.50
C208AL	C2042		15.88									0.84
C208AH	C2040H	25.40	7.95	7.85	3.96	18.8	19.9	12.0	2.03	14.1/3205	17.2	0.65
C208B		25.40	8.51	7.75	4.45	16.7	18.2	11.8	1.60	18.0/4091	19.4	0.55
C208BL			15.88									0.89
C210A	C2050	31.75	10.16	9.40	5.08	20.7	22.2	15.0	2.03	22.2/5045	28.1	0.78
C210AL	C2052		19.05									1.27
C212A	C2060	38.10	11.91	12.57	5.94	25.9	27.7	18.0	2.42	31.8/7227	36.8	1.12
C212AL	C2062		22.23									1.61
C212AH	C2060H	38.10	11.91	12.57	5.94	29.2	31.6	18.0	3.25	31.8/7227	41.6	1.44
C212AHL	C2062H		22.23									2.07
C216A	C2080	50.80	15.88	15.75	7.92	32.7	36.5	24.0	3.25	56.7/12886	65.7	2.08
C216AL	C2082		28.58									3.12
C216AH	C2080H	50.80	15.88	15.75	7.92	36.2	39.4	24.0	4.00	56.7/12886	70.0	2.54
C216AHL	C2082H		28.58									3.58
C220A	C2100	63.50	19.05	18.90	9.53	40.4	44.7	30.0	4.00	88.5/20114	102.6	3.01
C220AL	C2102		39.67									4.83
C220AH	C2100H	63.50	19.05	18.90	9.53	43.6	46.9	30.0	4.80	88.5/20114	112.4	3.56
C220AHL	C2102H		39.67									5.38
C224A	C2120	76.20	22.23	25.22	11.10	50.3	54.3	35.7	4.80	127.0/28864	147.3	4.66
C224AL	C2122		44.45									7.66
C224AH	C2120H	76.20	22.23	25.22	11.10	53.5	57.5	35.7	5.60	127.0/28864	160.9	5.26
C224AHL	C2122H		44.45									8.26
C232A	C2160	101.60	28.58	31.75	14.27	64.8	69.6	47.8	6.40	226.8/51545	278.9	8.15
C232AL	C2162		57.15									13.00
C232AH	C2160H	101.60	28.58	31.75	14.27	68.2	73.0	47.8	7.20	226.8/51545	285.8	9.06
C232AHL	C2162H		57.15									13.84

DRIVING PRECISION ROLLER CHAIN SPROCKET




05B
GB1244-85
DIN8187
ISO/R 606

Sprocket Tooth Parameters(mm)

Pitch	P	8
Roller Diameter	d-Φ	5
Radius of Arc	r ₃	5
Chamfer Angle Width	C	0.8
Rear Width	B ₁	2.8
Rear Width	b ₁	2.8
Rear Width	B ₂	2.7
Rear Width	B ₃	2.7

Z	de	dp	Simplex			Duplex		
			dm	D ₁	A	dm	D ₂	A
8	23.40	20.90	13	6	12	12	6	18
9	25.90	23.39	15	6	12	15	6	18
10	28.40	25.89	17	6	12	17	8	18
11	31.10	28.39	18	7	13	19	8	18
12	33.70	30.91	20	7	13	21	8	18
13	36.70	33.42	23	7	13	24	8	18
14	39.2	35.95	25	7	13	26	8	18
15	41.7	38.48	28	7	13	29	8	18
16	44.2	41.01	30	8	14	32	10	20
17	46.7	43.53	30	8	14	34	10	20
18	49.2	46.07	30	8	14	37	10	20
19	51.7	48.61	30	8	14	39	10	20
20	54.2	51.14	30	8	14	40	10	20
21	57.2	53.67	35	8	14	45	12	20
22	59.4	56.21	35	8	14	45	12	20
23	62.2	58.75	35	8	14	45	12	20
24	64.7	61.29	35	8	14	45	12	20
25	67.2	63.83	35	8	14	45	12	20
26	69.7	66.37	40	10	16	50	12	22
27	72.3	68.91	40	10	16	50	12	22
28	74.7	71.45	40	10	16	50	12	22
29	77.2	73.99	40	10	16	50	12	22
30	80.2	76.53	40	10	16	50	12	22
31	82.7	79.08	40	12	16	60	12	22
32	85.2	81.61	40	12	16	60	12	22
33	87.7	84.16	40	12	16	60	12	22
34	90.2	86.70	40	12	16	60	12	22
35	92.7	89.24	40	12	16	60	12	22
36	95.2	91.79	40	12	16	60	12	22
37	97.7	94.33	40	12	16	60	12	22
38	100.2	96.88	40	12	16	60	12	22
39	102.7	99.42	40	12	16	60	12	22
40	105.2	101.97	40	12	16	60	12	22
42	111.0	107.05	60	12	20	80	14	22
45	118.6	114.69	60	12	20	80	14	22
48	126.4	122.32	60	12	20	80	14	22
50	131.5	127.41	60	12	20	80	14	22
54	141.7	137.59	60	12	20	80	14	22
57	149.3	145.22	80	14	20	80	14	22
60	157.1	152.85	80	14	20	80	14	22

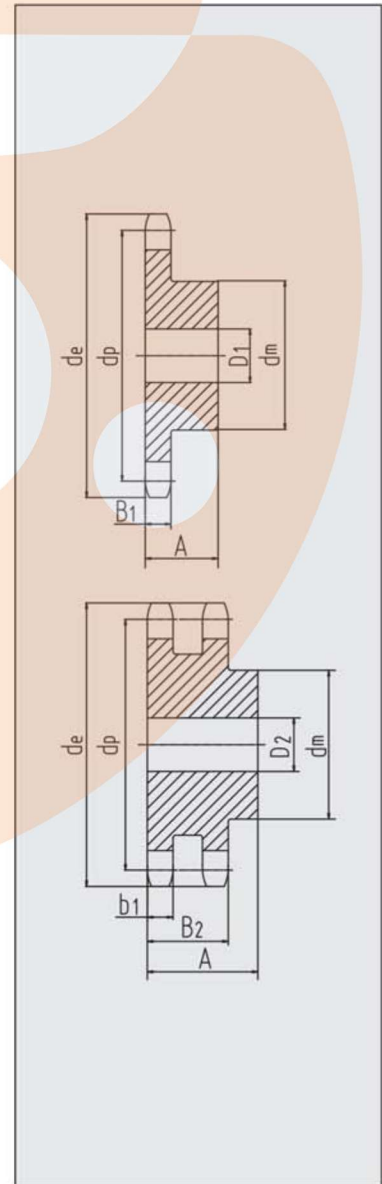


DRIVING PRECISION ROLLER CHAIN SPROCKET



06B GB1244-85 DIN8187 ISO/R 606	Sprocket Tooth Parameters(mm)		
	Pitch	P	9.525
	Roller Diameter	d-Φ	6.35
	Radius of Arc	r ₃	10
	Chamfer Angle Width	C	1
	Rear Width	B ₁	5.3
	Rear Width	b ₁	5.2
Rear Width	B ₂	15.4	
Rear Width	B ₃	25.6	

Z	d _e	d _p	Simplex			Duplex			Triplex		
			d _m	D ₁	A	d _m	D ₂	A	d _m	D ₃	A
8	28.6	24.89	15	8	20	15	8	25	15	8	32
9	31.5	27.85	18	8	20	18	8	25	18	8	32
10	34.5	30.82	20	8	20	20	8	25	20	8	32
11	37.5	33.80	22	8	25	22	10	30	22	10	35
12	40.5	36.80	25	8	25	25	10	30	25	12	35
13	43.5	39.80	28	8	25	28	10	30	28	12	35
14	46.5	42.80	31	8	25	31	10	30	31	12	35
15	49.5	45.81	34	8	25	34	10	30	34	12	35
16	52.5	48.82	37	10	28	37	12	30	37	12	35
17	55.5	51.83	40	10	28	40	12	30	40	12	35
18	58.6	54.85	43	10	28	43	12	30	43	12	35
19	61.6	57.87	45	10	28	46	12	30	46	12	35
20	64.6	60.89	46	10	28	49	12	30	49	12	35
21	67.6	63.91	48	12	28	52	16	30	52	16	40
22	70.6	66.93	50	12	28	55	16	30	55	16	40
23	73.7	69.95	52	12	28	58	16	30	58	16	40
24	76.7	72.97	54	12	28	61	16	30	61	16	40
25	79.7	76.00	57	12	28	64	16	30	64	16	40
26	82.7	79.02	60	12	28	67	16	30	67	16	40
27	85.7	82.04	60	12	28	70	16	30	70	16	40
28	88.8	85.07	60	12	28	73	16	30	73	16	40
29	91.8	88.09	60	12	28	76	16	30	76	16	40
30	94.8	91.12	60	12	28	79	16	30	79	16	40
31	97.9	94.15	65	14	30	80	16	30	80	16	40
32	100.9	97.17	65	14	30	80	16	30	80	16	40
33	103.9	100.20	65	14	30	80	16	30	80	16	40
34	106.9	103.23	65	14	30	80	16	30	85	16	40
35	110.0	106.26	65	14	30	80	16	30	85	16	40
36	113.0	109.29	70	16	30	90	16	30	90	16	40
37	116.0	112.32	70	16	30	90	16	30	90	16	40
38	119.0	115.34	70	16	30	90	16	30	90	16	40
39	122.1	118.37	70	16	30	90	16	30	90	16	40
40	125.1	121.40	70	16	30	90	16	30	90	16	40
42	132.1	127.46	70	16	30	90	16	30	90	16	40
45	141.1	136.54	70	16	30	90	16	30	90	16	40
48	150.2	145.64	70	16	30	90	16	30	90	16	40
50	156.3	151.69	80	20	30	90	20	30	90	20	40
54	168.4	163.82	80	20	30	90	20	30	90	20	40
57	177.5	172.91	80	20	30	90	20	30	90	20	40
60	186.6	181.99	80	20	30	90	20	30	90	20	40

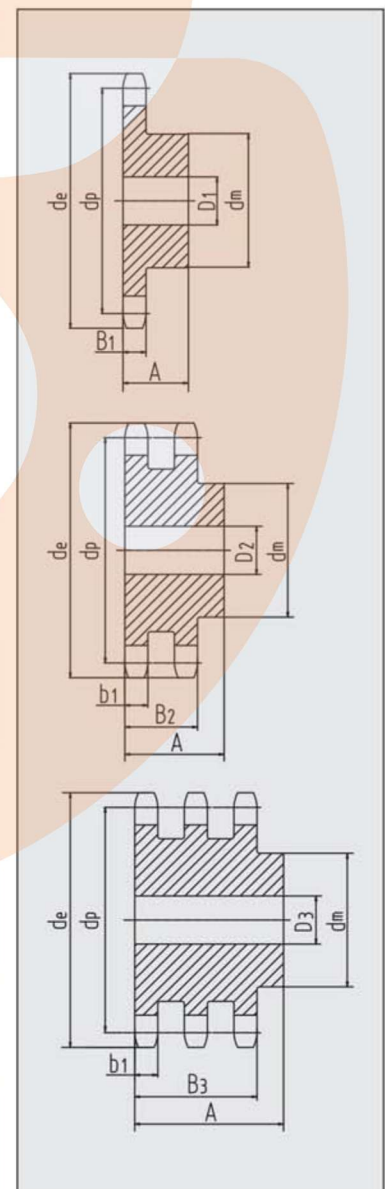


DRIVING PRECISION ROLLER CHAIN SPROCKET



08A GB1244-85 DIN8188 ISO/R 606 ANSI B 29. 1		Sprocket Tooth Parameters(mm)		
		Parameter	Symbol	Value
Pitch	P	12. 70		
Roller Diameter	d-Φ	7. 95		
Radius of Arc	r ₃	13. 5		
Chamfer Angle Width	C	1. 6		
Rear Width	B ₁	7. 2		
Rear Width	b ₁	7		
Rear Width	B ₂	21. 4		
Rear Width	B ₃	35. 8		

Z	d _e	d _p	Simplex			Duplex			Triplex		
			d _m	D ₁	A	d _m	D ₂	A	d _m	D ₃	A
8	39.3	33.18	20	10	25						
9	43.2	37.13	24	10	25						
10	47.2	41.10	26	10	25	28	10	32			
11	51.2	45.07	29	10	25	30	10	32			
12	55.2	49.07	33	10	25	35	12	35			
13	59.2	53.06	37	10	28	38	12	35			
14	63.2	57.07	41	10	28	42	12	35	42	16	50
15	67.2	61.09	45	10	28	46	12	35	46	16	50
16	71.2	65.10	50	12	28	50	16	38	50	16	50
17	75.2	69.11	52	12	28	54	16	38	54	16	50
18	79.2	73.14	56	12	28	58	16	38	58	16	50
19	83.3	77.16	60	12	28	62	16	38	62	16	50
20	87.3	81.19	64	12	28	66	16	38	66	16	50
21	91.3	85.22	68	14	28	70	16	40	70	16	55
22	95.4	89.24	70	14	28	70	16	40			
23	99.4	93.27	70	14	28	70	16	40			
24	103.4	97.29	70	14	28	75	16	40			
25	107.4	101.33	70	14	28	80	16	40	80	16	55
26	111.5	105.36	70	16	30	85	16	40			
27	115.5	109.40	70	16	30	85	16	40			
28	119.5	113.42	70	16	30	90	16	40			
29	123.6	117.46	80	16	30	90	16	40			
30	127.6	121.50	80	16	30	100	16	40	100	20	55
31	131.6	125.54	90	16	30	100	16	40			
32	135.7	129.59	90	16	30	100	16	40			
33	139.7	133.60	90	16	30	100	16	40			
34	143.8	137.64	90	16	30	100	16	40			
35	147.8	141.68	90	16	30	100	16	40			
36	151.8	145.72	90	16	35	100	20	40			
37	155.9	149.76	90	16	35	100	20	40			
38	159.9	153.80	90	16	35	100	20	40			
39	163.9	157.83	90	16	35	100	20	40			
40	168.0	161.87	90	16	35	100	20	40			
42	176.6	169.95	100	20	35	110	20	40			
45	188.7	182.07	100	20	35	110	20	40			
48	200.8	194.18	100	20	35	110	20	40			
50	208.9	202.26	100	20	35	110	20	40			
54	225.0	218.43	100	20	35	110	20	40			
57	237.2	230.54	100	20	35	110	20	40			
60	249.3	242.66	100	20	35	110	20	40			

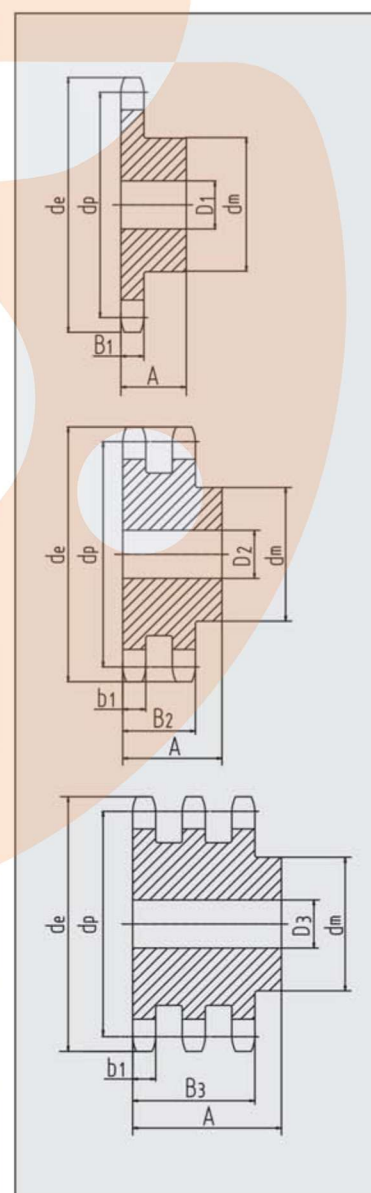


DRIVING PRECISION ROLLER CHAIN SPROCKET



<p>08B GB1244-85 DIN8187 ISO/R 606</p>	Sprocket Tooth Parameters(mm)		
	Pitch	P	12. 70
	Roller Diameter	d-Φ	8. 51
	Radius of Arc	r ₃	13
	Chamfer Angle Width	C	1. 3
	Rear Width	B ₁	7. 2
	Rear Width	b ₁	7
Rear Width	B ₂	21	
Rear Width	B ₃	34. 9	

Z	d _e	d _p	Simplex			Duplex			Triplex		
			d _m	D ₁	A	d _m	D ₂	A	d _m	D ₃	A
8	38.0	33.18	20	10	25	20	10	32	20	10	46
9	42.0	37.13	24	10	25	24	10	32	24	12	46
10	45.9	41.10	26	10	25	28	10	35	28	12	46
11	49.9	45.07	29	10	25	32	12	35	32	16	50
12	53.9	49.07	33	10	28	35	12	35	35	16	50
13	57.9	53.06	37	10	28	38	12	35	38	16	50
14	61.9	57.07	41	10	28	42	12	35	42	16	50
15	65.9	61.09	45	10	28	46	12	35	46	16	50
16	69.9	65.10	50	12	28	50	16	38	50	16	50
17	74.0	69.11	52	12	28	54	16	38	54	16	50
18	78.0	73.14	56	12	28	58	16	38	58	16	50
19	82.0	77.16	60	12	28	62	16	38	62	16	50
20	86.0	81.19	64	12	28	66	16	38	66	16	50
21	90.1	85.22	68	14	28	70	16	40	70	16	55
22	94.1	89.24	70	14	28	70	16	40	70	16	55
23	98.1	93.27	70	14	28	70	16	40	70	16	55
24	102.1	97.29	70	14	28	75	16	40	75	16	55
25	106.2	101.33	70	14	28	80	16	40	80	16	55
26	110.2	105.36	70	16	30	85	16	40	85	20	55
27	114.2	109.40	70	16	30	85	16	40	85	20	55
28	118.3	113.42	70	16	30	90	16	40	90	20	55
29	122.3	117.46	80	16	30	95	16	40	95	20	55
30	126.3	121.50	80	16	30	100	16	40	100	20	55
31	130.4	125.54	90	16	30	100	20	40	110	20	55
32	134.4	129.56	90	16	30	100	20	40	110	20	55
33	138.4	133.60	90	16	30	100	20	40	110	20	55
34	142.5	137.64	90	16	30	100	20	40	110	20	55
35	146.5	141.68	90	16	30	100	20	40	110	20	55
36	150.6	145.72	90	16	35	100	20	40	120	25	55
37	154.6	149.76	90	16	35	100	20	40	120	25	55
38	158.6	153.80	90	16	35	100	20	40	120	25	55
39	162.7	157.83	90	16	35	100	20	40	120	25	55
40	166.7	161.87	90	16	35	100	20	40	120	25	55
42	176.5	169.95	90	16	35	100	20	40	120	25	55
45	188.6	182.07	90	16	35	100	20	40	120	25	55
48	200.7	194.18	90	16	35	100	20	40	120	25	55
50	208.8	202.26	100	20	35	110	20	40	120	25	55
54	225.0	218.43	100	20	35	110	20	40	120	25	55
57	237.1	230.54	100	20	35	110	20	40	120	25	55
60	249.2	242.68	100	20	35	110	20	40	120	25	55

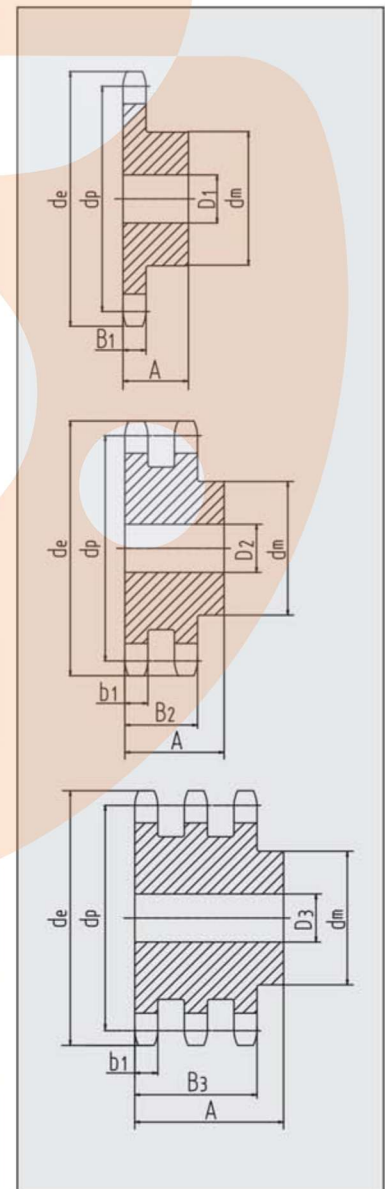


DRIVING PRECISION ROLLER CHAIN SPROCKET



<p>10A GB1244-85 DIN8188 ISO/R 606 ANSI B 29. 1</p>	Sprocket Tooth Parameters(mm)		
	Pitch	P	15.875
	Roller Diameter	d-Φ	10.16
	Radius of Arc	r ₃	17
	Chamfer Angle Width	C	2
	Rear Width	B ₁	87
	Rear Width	b ₁	8.4
	Rear Width	B ₃	44.6

Z	de	dp	Simplex			Duplex			Triplex		
			dm	D ₁	A	dm	D ₂	A	dm	D ₃	A
8	48.4	41.48	25	10	25						
9	53.3	46.42	30	10	25						
10	58.3	51.37	35	10	25						
11	63.2	56.34	37	12	30	35	12	40			
12	68.2	61.34	42	12	30	40	16	40	44	16	55
13	73.2	66.32	47	12	30	44	16	40	50	16	55
14	78.2	71.34	52	12	30	49	16	40	54	16	55
15	83.2	76.36	57	12	30	54	16	40	59	16	60
16	88.3	81.37	60	12	30	59	16	45	64	16	60
17	93.3	86.39	60	12	30	64	16	45	69	16	60
18	98.3	91.42	70	14	30	69	16	45	74	16	60
19	103.3	96.45	75	14	30	74	16	45	79	16	60
20	108.3	101.49	75	14	30	79	16	45	84	16	60
21	113.4	106.52	80	16	30	84	16	45	85	20	60
22	118.4	111.55	80	16	30	85	20	45			
23	123.5	116.57	80	16	30	90	20	45	105	20	60
24	128.5	121.62	80	16	30	95	20	45			
25	133.6	126.66	80	16	30	100	20	45			
26	138.6	131.70	90	20	35	105	20	45			
27	143.6	136.75	90	20	35	110	20	45			
28	148.7	141.78	90	20	35	110	20	45	120	20	60
29	153.7	146.83	95	20	35	115	20	45			
30	158.8	151.87	95	20	35	115	20	45			
31	163.8	156.92	95	20	35	120	20	45			
32	168.9	161.95	95	20	35	120	20	45			
33	173.9	167.00	95	20	35	120	20	45			
34	178.9	172.05	100	20	35	120	20	45			
35	184.0	177.10	100	20	35	120	20	45			
36	189.0	182.15	100	20	35	120	20	45			
37	194.1	187.20	100	20	35	120	20	45			
38	199.1	192.24	100	20	35	120	20	45			
39	204.2	197.29	100	20	35	120	20	45			
40	209.2	202.34	100	20	35	120	20	45			
42	220.8	212.44	100	20	35	120	20	45			
45	236.0	227.58	110	20	35	120	20	45			
48	251.1	242.73	110	20	35	120	20	45			
50	261.2	252.92	110	25	35	120	20	45			
54	281.4	273.03	110	25	35	120	20	45			
57	296.6	288.18	110	25	35	120	20	45			
60	311.7	303.32	110	25	35	120	20	45			

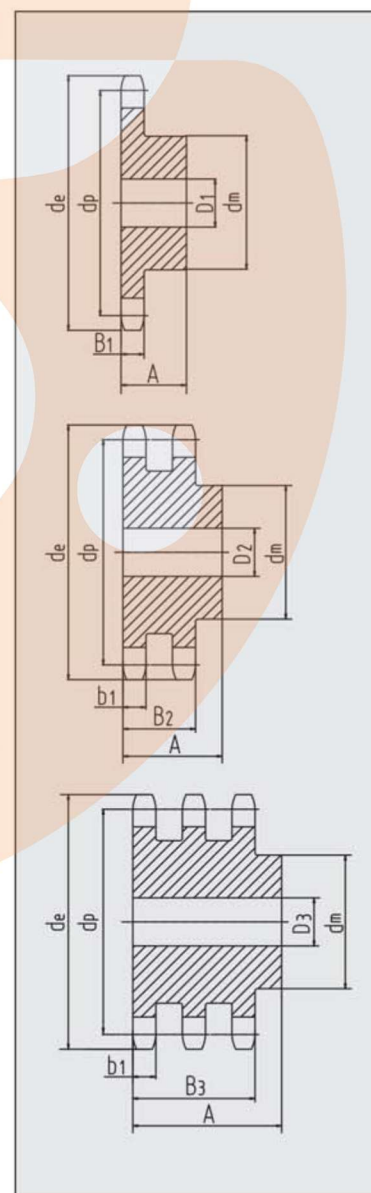


DRIVING PRECISION ROLLER CHAIN SPROCKET



12A GB1244-85 DIN8188 ISO/R 606 ANSI B 29.1	Sprocket Tooth Parameters(mm)		
	Pitch	P	19.05
	Roller Diameter	d-Φ	11.91
	Radius of Arc	r ₃	20
	Chamfer Angle Width	C	2.4
	Rear Width	B ₁	11.6
	Rear Width	b ₁	11.3
	Rear Width	B ₃	56.9

Z	d _e	d _p	Simplex			Duplex			Triplex		
			d _m	D ₁	A	d _m	D ₂	A	d _m	D ₃	A
8	58.1	49.78	31	12	30						
9	64.0	55.70	37	12	30						
10	70.0	61.64	42	12	30	42	16	45			
11	76.0	67.61	46	16	35	47	16	50			
12	81.9	73.60	52	16	35	53	16	50	53	20	70
13	87.9	79.59	58	16	35	59	16	50	65	20	70
14	94.0	85.61	64	16	35	65	20	50	71	20	70
15	100.0	91.63	70	16	35	71	20	50	77	20	70
16	106.0	97.65	75	16	35	77	20	50	83	20	70
17	112.0	103.67	80	16	35	83	20	50	89	20	70
18	118.0	109.71	80	16	35	89	20	50	95	20	70
19	124.1	115.75	80	16	35	95	20	50	100	20	70
20	130.1	121.78	80	16	35	100	20	50	100	20	70
21	136.2	127.82	90	20	40	100	20	50			
22	142.2	133.86	90	20	40	100	20	50			
23	148.2	139.90	90	20	40	110	20	50			
24	154.3	145.94	90	20	40	110	20	50			
25	160.3	152.00	90	20	40	120	20	50			
26	166.4	158.04	95	20	40	120	20	50			
27	172.4	164.09	95	20	40	120	20	50			
28	178.5	170.13	95	20	40	120	20	50			
29	184.5	176.19	95	20	40	120	20	50			
30	190.6	182.25	95	20	40	120	20	50	120	25	70
31	196.6	188.31	95	20	40	120	20	50			
32	202.7	194.35	95	20	40	120	20	50			
33	208.8	200.40	95	20	40	120	20	50			
34	214.8	206.46	95	20	40	120	20	50			
35	220.9	212.52	95	20	40	120	20	50			
36	226.9	218.58	100	20	40	120	20	50			
37	233.0	224.64	100	20	40	120	20	50			
38	239.0	230.69	100	25	40	120	25	50			
39	245.1	236.75	100	25	40	120	25	50			
40	251.1	242.81	100	25	40	120	25	50			
42	265.2	254.93	100	25	40						
45	283.3	273.10	100	25	40						
48	301.5	291.27	100	25	40						
50	313.6	303.39	110	30	40						
54	337.9	327.64	110	30	40						
57	356.1	345.81	110	30	40						
60	374.2	363.99	110	30	40						

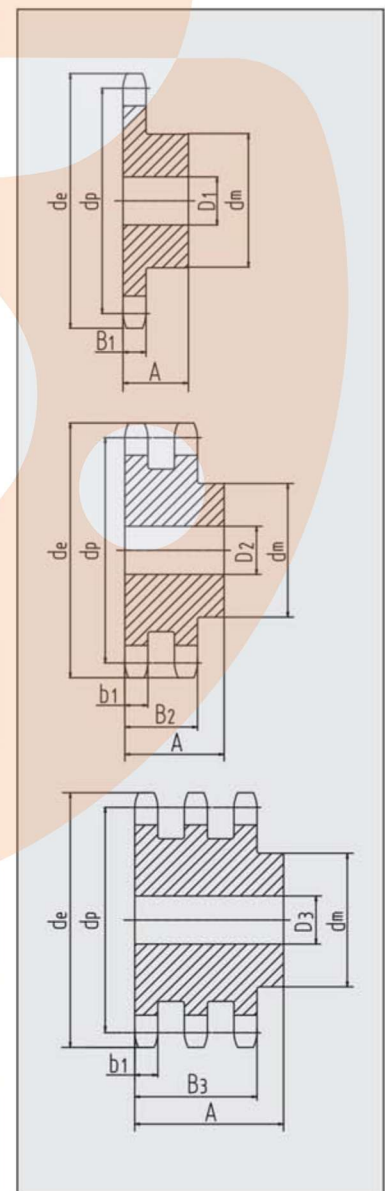


DRIVING PRECISION ROLLER CHAIN SPROCKET



16A GB1244-85 DIN8188 ISO/R 606 ANSI B 29. 1		Sprocket Tooth Parameters(mm)		
		Parameter	Symbol	Value
Pitch	P	25.40		
Roller Diameter	d-Φ	15.88		
Radius of Arc	r ₃	26		
Chamfer Angle Width	C	3.2		
Rear Width	B ₁	14.6		
Rear Width	b ₁	14.1		
Rear Width	B ₂	43.4		
Rear Width	B ₃	72.7		

Z	d _e	d _p	Simplex			Duplex			Triplex		
			d _m	D ₁	A	d _m	D ₂	A	d _m	D ₃	A
8	77.9	66.37	42	16	35	42	20	65			
9	85.8	74.27	50	16	35	50	20	65			
10	93.8	82.19	55	16	35	56	20	65			
11	101.7	90.14	61	16	40	64	20	70			
12	109.7	98.14	69	16	40	72	20	70	52	25	100
13	117.7	106.12	78	16	40	80	20	70			
14	125.7	114.15	84	16	40	88	20	70			
15	133.7	122.17	92	16	40	96	20	70	96	25	100
16	141.8	130.20	100	20	45	104	25	70			
17	149.8	138.22	100	20	45	112	25	70	115	25	100
18	157.8	146.28	100	20	45	120	25	70			
19	165.9	154.33	100	20	45	128	25	70	128	25	100
20	173.9	162.38	100	20	45	130	25	70			
21	182.0	170.43	110	20	50	130	25	70	130	25	100
22	190.1	178.48	110	20	50	130	25	70			
23	198.1	186.53	110	20	50	130	25	70	130	25	100
24	206.2	194.59	110	20	50	130	25	70			
25	214.2	202.66	110	20	50	130	25	70	130	25	100
26	222.3	210.72	120	20	50	130	25	70			
27	230.4	218.79	120	20	50	130	25	70			
28	238.4	226.85	120	20	50	130	25	70			
29	246.5	234.92	120	20	50	130	25	70			
30	254.6	243.00	120	20	50	130	25	70			
31	262.6	251.08	120	25	50	140	25	70			
32	270.7	259.13	120	25	50	140	25	70			
33	278.8	267.21	120	25	50	140	25	70			
34	286.9	275.28	120	25	50	140	25	70			
35	294.9	283.36	120	25	50	140	25	70			
36	303.0	291.44	120	25	50	140	25	70			
37	311.1	299.51	120	25	50	140	25	70			
38	319.2	307.59	120	25	50	140	25	70			
39	327.2	315.67	120	25	50	140	25	70			
40	335.3	323.73	120	25	50	140	25	70			
42	357.7	339.90	120	25	50						
45	377.9	364.12	120	25	50						
48	402.1	388.36	120	25	50						
50	418.3	404.52	130	30	50						
54	450.6	436.85	130	30	50						
57	474.9	461.07	130	30	50						
60	499.1	485.32	130	30	50						

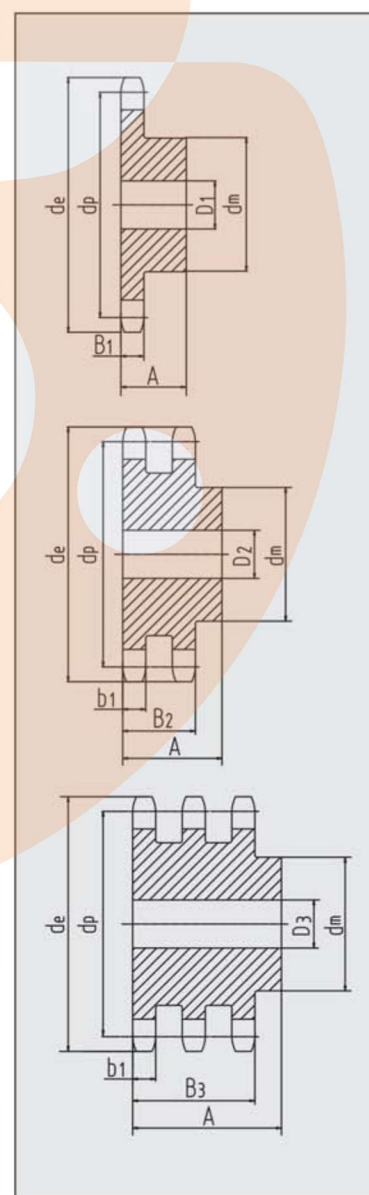

DRIVING PRECISION ROLLER CHAIN SPROCKET



20A

GB1244-85

DIN8188


ISO/R 606

ANSI B 29.1

Sprocket Tooth Parameters(mm)

Pitch	P	31.75
Roller Diameter	d-Φ	19.05
Radius of Arc	r ₃	33.5
Chamfer Angle Width	C	4
Rear Width	B ₁	17.6
Rear Width	b ₁	17.1
Rear Width	B ₂	52.9
Rear Width	B ₃	

Z	de	dp	Simplex			Duplex		
			dm	D ₁	A	dm	D ₂	A
8	96.0	82.96	53	20	40	53	20	75
9	106.5	92.84	63	20	40	63	20	75
10	117.0	102.74	70	20	40	70	20	75
11	127.0	112.68	77	20	45	80	25	80
12	137.0	122.68	88	20	45	90	25	80
13	147.5	132.65	98	20	45	100	25	80
14	157.6	142.68	108	20	45	110	25	80
15	167.7	152.72	118	20	45	120	25	80
16	177.7	162.75	120	25	50	120	30	80
17	187.8	172.78	120	25	50	120	30	80
18	197.8	182.85	120	25	50	120	30	80
19	207.9	192.91	120	25	50	120	30	80
20	217.9	202.98	120	25	50	120	30	80
21	228.0	213.04	140	30	55	140	30	80
22	238.1	223.11	140	30	55	140	30	80
23	248.2	233.17	140	30	55	140	30	80
24	258.3	243.23	140	30	55	140	30	80
25	268.4	253.33	140	30	55	140	30	80
26	278.4	263.40	150	30	55	150	30	80
27	288.5	273.48	150	30	55	150	30	80
28	298.5	283.56	150	30	55	150	30	80
29	308.6	293.65	150	30	55	150	30	80
30	318.7	303.75	150	30	55	150	30	80
31	328.8	313.85	150	30	55	150	30	80
32	338.9	323.91	150	30	55	150	30	80
33	349.0	334.01	150	30	55	150	30	80
34	359.1	344.10	150	30	55	150	30	80
35	369.2	354.20	150	30	55	150	30	80
36	379.3	364.30	150	30	55	150	30	80
37	389.3	374.39	150	30	55	150	30	80
38	399.4	384.49	150	30	55	150	30	80
39	409.5	394.59	150	30	55	150	30	80
40	419.6	404.66	150	30	55	150	30	80
42	440.8	424.88	150	30	55			
45	471.1	455.17	150	30	55			
48	501.4	485.46	150	30	55			
50	521.6	505.65	150	30	55			
54	562.0	546.07	150	30	55			
57	592.3	576.36	150	30	55			
60	622.6	606.65	150	30	55			

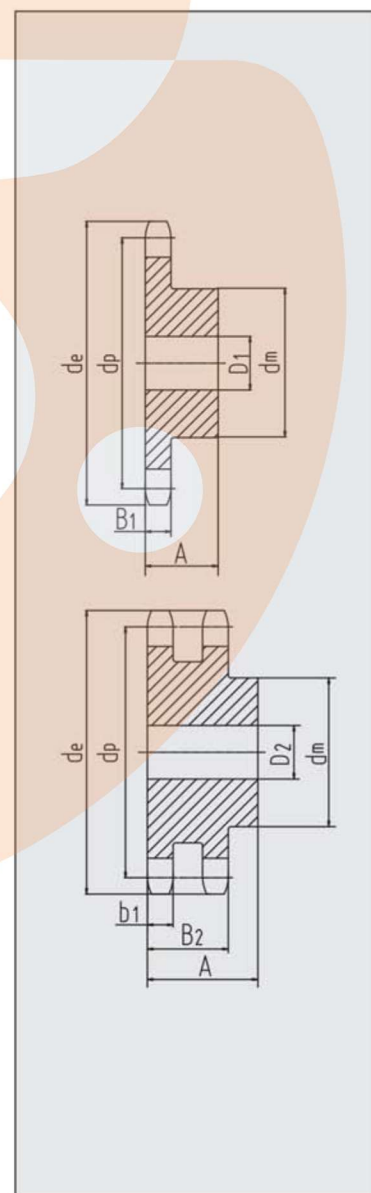


DRIVING PRECISION ROLLER CHAIN SPROCKET



		Sprocket Tooth Parameters(mm)	
		Parameter	Value
24A GB1244-85 DIN8188 ISO/R 606 ANSI B 29. 1	Pitch	P	38.10
	Roller Diameter	d-Φ	22.23
	Radius of Arc	r ₃	40.5
	Chamfer Angle Width	C	4.8
	Rear Width	B ₁	23.5
	Rear Width	b ₁	22.9
	Rear Width	B ₂	68.3
	Rear Width	B ₃	

Z	de	dp	Simplex			Duplex		
			dm	D ₁	A	dm	D ₂	A
8	113.0	99.55	58	20	45			
9	125.0	111.40	70	20	45			
10	137.0	123.29	80	20	45	80	25	95
11	149.0	135.21	90	25	50			
12	161.0	147.22	102	25	50	102	25	100
13	173.0	159.18	114	25	50	128	25	100
14	185.0	171.22	128	25	50	132	25	100
15	197.0	183.26	132	25	50	136	30	100
16	209.0	195.30	136	25	55	136	30	100
17	221.0	207.34	140	25	55	160	30	100
18	233.0	219.43	140	25	55	160	30	100
19	245.5	231.49	140	25	55			
20	257.5	243.57	140	25	55	160	30	100
21	270.5	255.65	150	30	60			
22	282.5	267.73	150	30	60			
23	294.5	279.80	150	30	60	160	30	100
24	307.0	291.88	150	30	60			
25	319.0	304.00	150	30	60			
26	331.0	316.08	150	30	60			
27	343.0	328.19	150	30	60			
28	355.0	340.27	150	30	60	160	30	100
29	367.5	352.38	150	30	60			
30	379.5	364.50	150	30	60			
31	391.5	376.62	150	30	60			
32	403.5	388.69	150	30	60			
33	415.5	400.81	150	30	60			
34	428.0	412.93	150	30	60			
35	440.0	425.40	150	30	60			
36	452.0	437.16	150	30	60			
37	464.0	449.27	150	30	60			
38	476.5	461.39	150	30	60			
39	488.5	473.50	150	30	60			
40	501.5	485.62	150	30	60			
42	525.5	509.85	150	30	60			
45	562.5	546.20	150	30	60			
48	598.5	582.55	150	30	60			
50	622.5	606.78	150	30	60			
54	671.0	655.25	150	30	60			
57	707.5	691.63	150	30	60			
60	745.0	727.97	150	30	60			

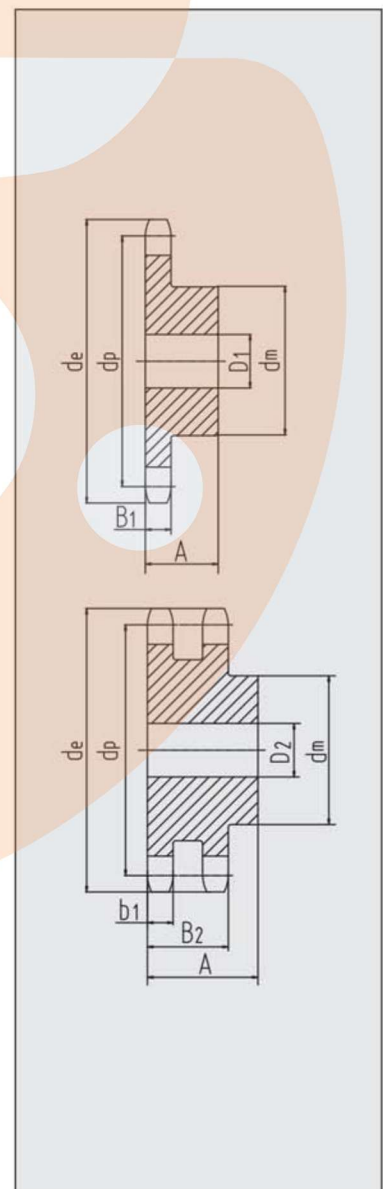


DRIVING PRECISION ROLLER CHAIN SPROCKET



28A GB1244-85 DIN8188 ISO/R 606 ANSI B 29.1	Sprocket Tooth Parameters(mm)		
	Pitch	P	44.45
	Roller Diameter	d-Φ	25.40
	Radius of Arc	r ₃	47.50
	Chamfer Angle Width	C	5.80
	Rear Width	B ₁	23.50
	Rear Width	b ₁	22.90
Rear Width	B ₂	71.90	
Rear Width	B ₃	121.19	

Z	de	dp	Simplex			Duplex		
			dm	D ₁	A	dm	D ₂	
8	132	116.15	74	25	70			
9	146	129.96	88	25	70			
10	160	143.85	100	25	70			
11	174	157.77	112	25	70			
12	188	171.74	125	25	70			
13	204	185.75	125	25	70	145	30	120
14	218	199.76	125	25	70	145	30	120
15	232	213.79	125	25	70	145	30	120
16	246	227.84	160	30	75	145	30	120
17	260	241.90	160	30	75	160	30	120
18	274	255.98	160	30	75	160	30	120
19	289	270.66	160	30	75	180	30	120
20	303	284.15	160	30	75	180	30	120
21	317	298.24	160	30	75	180	30	120
22	331	312.34	160	30	75			
23	345	326.44	160	30	75			
24	359	340.55	160	30	75			
25	373	354.66	160	30	75			
26	387	368.77	160	30	75			
27	401	382.88	160	30	75			
28	416	397.00	160	30	75			
29	430	411.12	160	30	75			
30	444	425.24	160	30	75			
31	458	439.37	180	30	75			
32	472	453.49	180	30	75			
33	486	467.62	180	30	75			
34	500	481.75	180	30	75			
35	514	495.88	180	30	75			
36	529	510.01	180	30	75			
37	543	524.13	180	30	75			
38	557	538.27	180	30	75			
39	571	552.40	180	30	75			
40	585	566.54	180	30	75			
42								
45	656	637.22	180	30	75			
48								
50	726	707.91	180	30	75			
54								
57	825	806.90	180	30	75			
60	869	849.32	180	30	75			

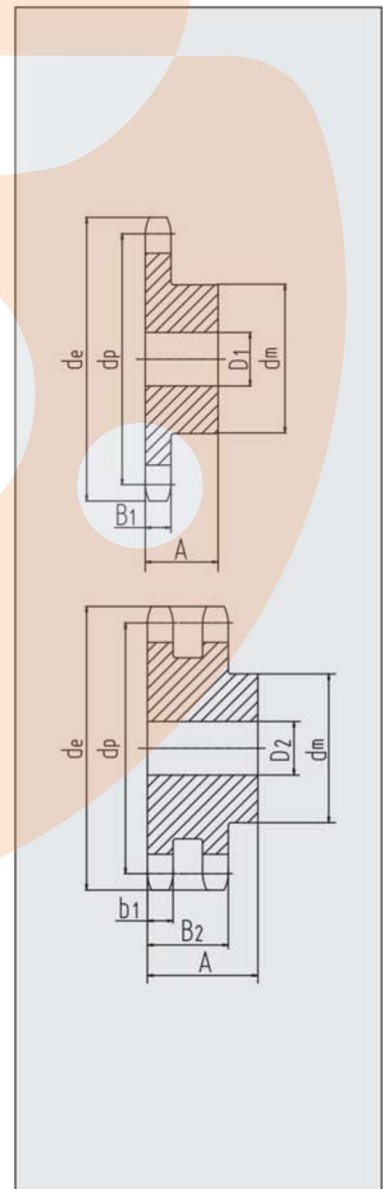


DRIVING PRECISION ROLLER CHAIN SPROCKET



32A GB1244-85 DIN8188 ISO/R 606 ANSI B 29. 1	Sprocket Tooth Parameters(mm)		
	Pitch	P	50.80
	Roller Diameter	d-Φ	28.58
	Radius of Arc	r ₃	54
	Chamfer Angle Width	C	7
	Rear Width	B ₁	29.30
	Rear Width	b ₁	28.60
	Rear Width	B ₂	87.50
	B ₃		

Z	de	dp	Simplex			Duplex		
			dm	D ₁	A	dm	D ₂	A
8	152	132.74	85	30	80			
9	168	148.54	100	30	80			
10	184	164.39	115	30	80			
11	200	180.31	125	30	80			
12	216	196.29	133	30	80	135	40	140
13	235	212.29	145	30	80	145	40	140
14	251	228.29	145	30	80	145	40	140
15	267	244.30	145	30	80	150	40	140
16	283	260.40	160	30	90	160	40	140
17	299	276.46	160	30	90	180	40	140
18	315	292.55	160	30	90	180	40	140
19	331	308.66	160	30	90	180	40	140
20	347	324.71	180	30	90	180	40	140
21	363	340.82	180	40	90	200	40	140
22	379	356.98	180	40	90			
23	396	373.08	180	40	90	200	40	140
24	412	398.18	180	40	90			
25	428	405.33	180	40	90	200	40	140
26	444	421.44	180	40	90			
27	460	437.59	180	40	90			
28	476	453.69	180	40	90			
29	492	469.85	180	40	90			
30	508	486.00	180	40	90	220	40	140
31	525	502.13	200	40	90			
32	541	518.27	200	40	90			
33	557	534.42	200	40	90			
34	573	550.56	200	40	90			
35	589	566.71	200	40	90			
36	605	582.86	200	40	90			
37	622	599.01	200	40	90			
38	638	615.16	200	40	90			
39	654	631.31	200	40	90			
40	670	647.47	200	40	90			
42								
45	751	728.24	220	45	90			
48								
50	832	809.04	220	45	90			
54								
57	945	922.16	240	45	90			
60	993	970.65	240	45	90			

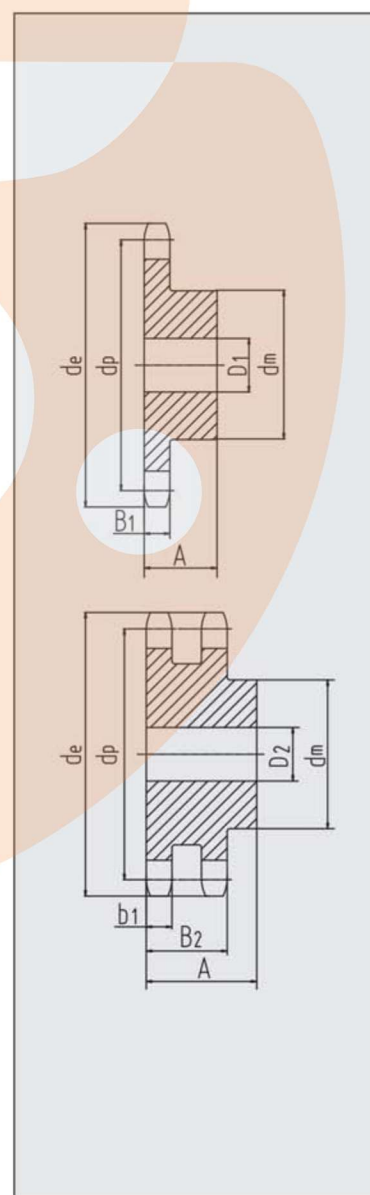


DRIVING PRECISION ROLLER CHAIN SPROCKET



40A GB1244-85 DIN8188 ISO/R 606	Sprocket Tooth Parameters(mm)		
	Pitch	P	63.50
	Roller Diameter	d-Φ	39.68
	Radius of Arc	r ₃	66
	Chamfer Angle Width	C	9
	Rear Width	B ₁	35.28
	Rear Width	b ₁	34.50
	Rear Width	B ₃	106.2

Z	de	dp	Simplex			Duplex		
			dm	D ₁	A	dm	D ₂	A
8								
9								
10	233.68	205.49	140	40	75			
11	254.08	225.39	150	40	75	150	40	150
12	275.08	245.35	160	40	75	160	40	160
13	295.66	265.34	180	40	75	180	40	160
14	321.07	285.37	190	40	90	200	40	160
15	336.80	305.42	200	40	90	220	40	160
16	357.38	325.49	200	40	90	220	40	170
17	377.70	345.59	200	40	90	220	40	170
18	398.27	365.68	200	40	90	220	40	170
19	418.60	385.80	200	40	90	220	40	170
20	439.17	405.92	200	40	90	220	40	170
21	459.49	426.05	200	40	90	220	40	170
22	479.81	446.19	215	40	100	220	40	170
23	500.17	446.34	215	40	100	220	40	170
24	520.45	486.49	215	40	100	220	40	170
25	540.77	506.65	215	40	100	220	40	170
26	561.09	526.81	215	40	115	220	40	170
27	581.41	546.98	215	40	115	220	40	170
28	601.73	567.14	215	40	115	220	40	170
29								
30	642.37	607.49	215	40	115	220	40	170
31								
32	682.75	647.85	215	40	115	220	40	170
33								
34								
35	743.71	708.39	215	40	115	220	40	170
36								
37								
38	804.52	768.96	215	40	115	220	40	170
39								
40	845.06	809.34	230	40	125	220	40	170
42								
45	946.15	910.31	230	40	125			
48								
50								
54	1128.27	1092.10	230	40	125			
57								
60	1249.68	1213.31	230	40	125			

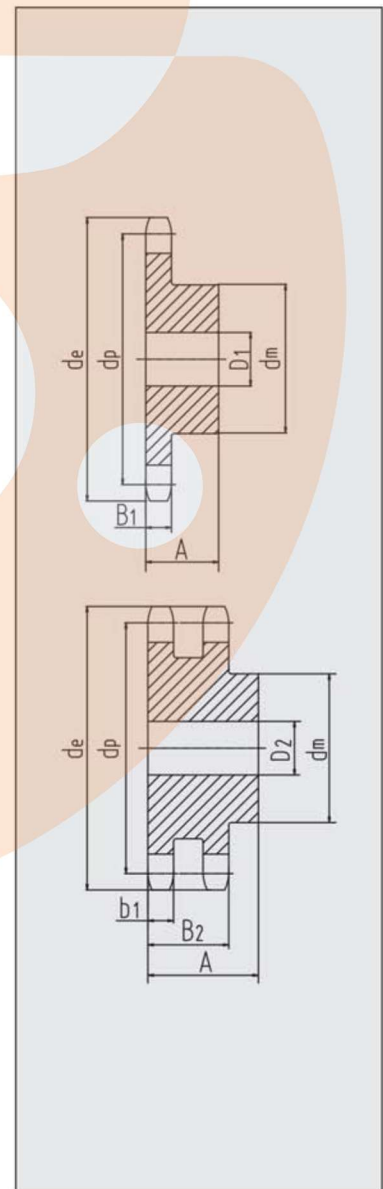




16A Stereo garage Chain



530 Motorcycle Chain



Motorcycle Chain

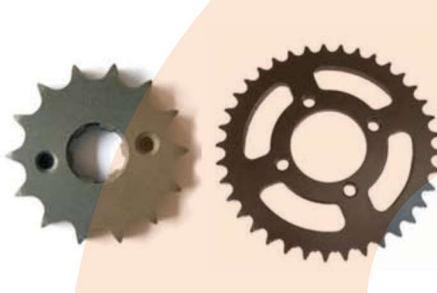

Motorcycle Sprocket



24A Sprocket



Diesel Engine Gear



Worm



Straight Gear



Helical Gear



Spiral bevel Gear



Traction Chain



Hand Pulling Block



/IND.SGARIA

